


EDA-32S

31.5" Full-Color ePaper Display

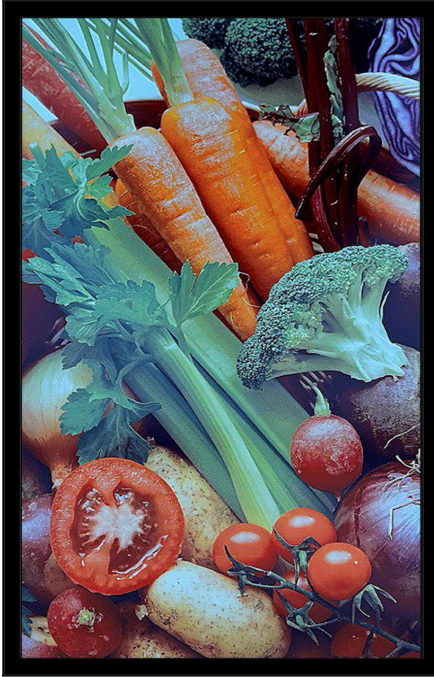

Features

- E Ink Spectra™ 6 features full-color and E Ink Sparkle™ partial image flashing technology for indoor digital signage
- Ultra-low reflection and low glare
- Support RS-CMS for content and device management
- Support updating contents via USB, Ethernet, or Wi-Fi
- Energy-efficient and low-carbon emissions
- Complied with SDGs

Specifications

E Ink Brand	Spectra™ 6
Resolution	2560 x 1440
Color	Vivid Full Color
Active Area (W x H)	697 x 392 mm
CPU	Arm® Processor
OS	Embedded Linux
Network	Ethernet (100M bps) Wi-Fi (Optional, 802.11a/b/g/n/ac, 2T2R)
I/O	USB 2.0 Type-A x 2 RJ45 x 1 DC In x 1
Power Supply	DC 12V Power Adapter
Dimensions (W x H x D)	721 x 417 x 30 mm
Operating Temperature	0 ~ 50 °C
Weight	3.5 kg (without power adaptor)
Software	Built-in Player and Optional RS-CMS Support EPD API
Support File Format	BMP, JPG, PNG
Mounting	Support VESA 100 x 100 mm

EDA-32S

